

STAX

Wire modules in order as shown on the diagram

Maximum Amperage per lead: 16 Amps @120V

STAX Boost Power Continuation Cable found in (Yellow Labeled bag). Required after each 12th consecutive module per display face.

STAX Controller Cable Kit found in (Red Labeled bag). One cable kit per display face. Includes one Primary Controller Power Cable and one 1st Module Power/Data Cable

Multiple leads can be connected together and share a breaker. Multiple circuits may share the same neutrals. Please follow local NEC Codes & regulations



Primary Display

Lead	Max Watts	Avg Watts	Amps @120V
1	1915	1896	16.0
2	878	1027	7.3
3			
Total	2793	2923	23.3


Secondary Display


Lead	Max Watts	Avg Watts	Amps @120V
4	1915	1896	16.0
5	878	1027	7.3
6			
Total	2793	2923	23.3

SECONDARY DISPLAY REAR VIEW
First module connection must start in this corner

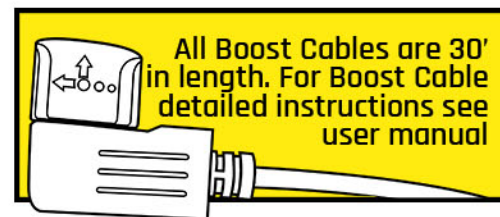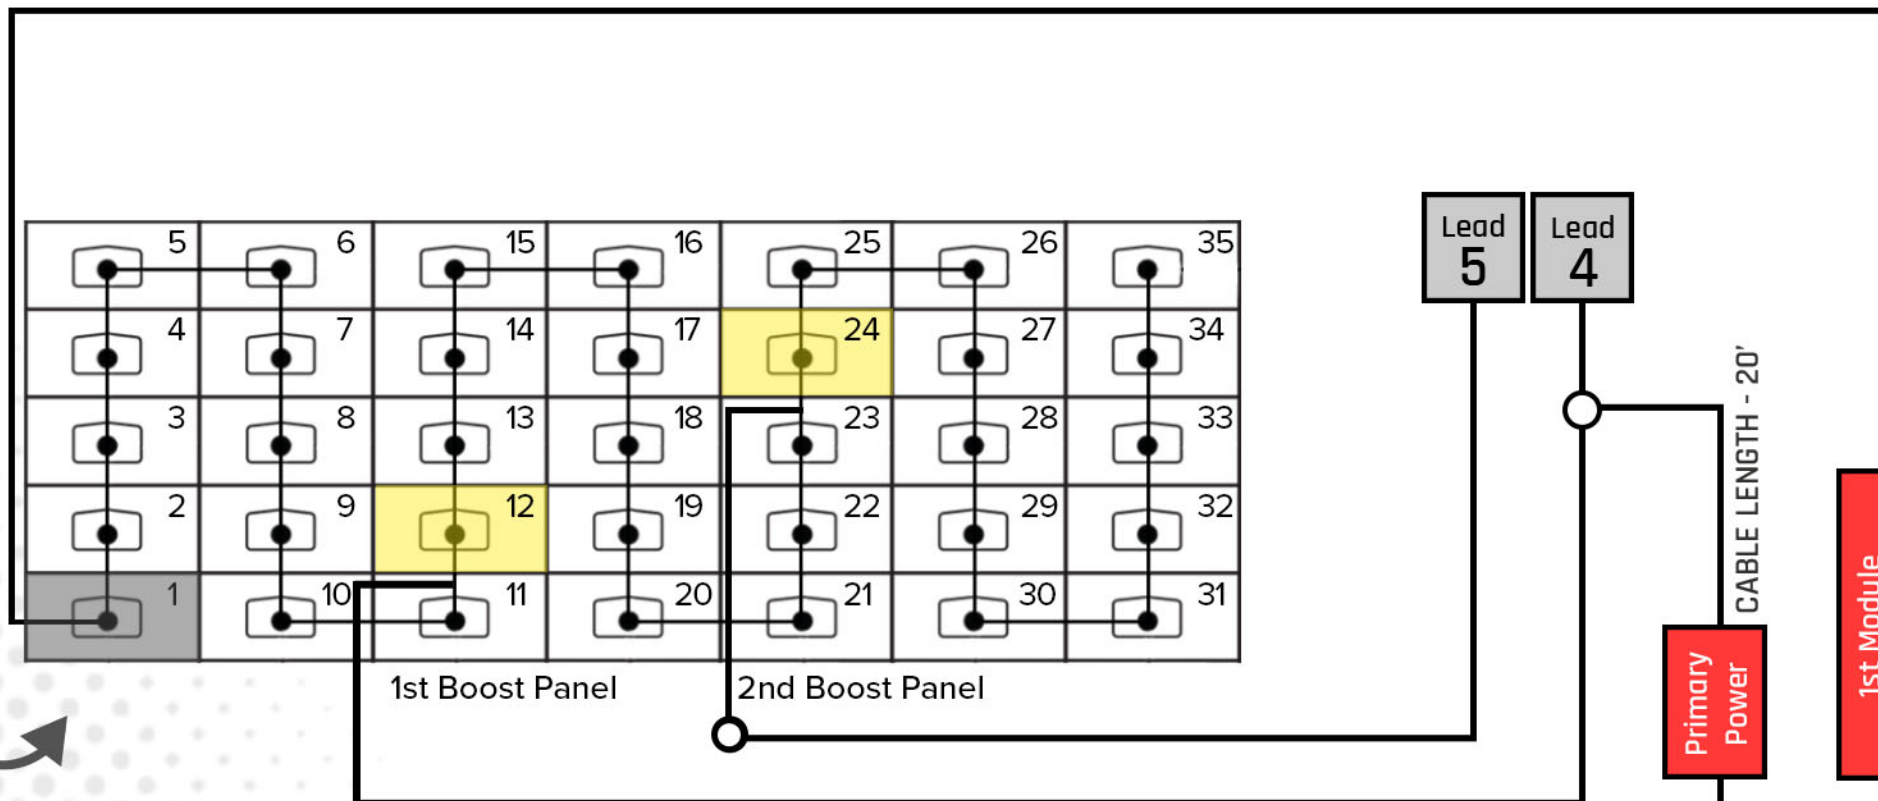

PRIMARY DISPLAY REAR VIEW
First module connection must start in this corner

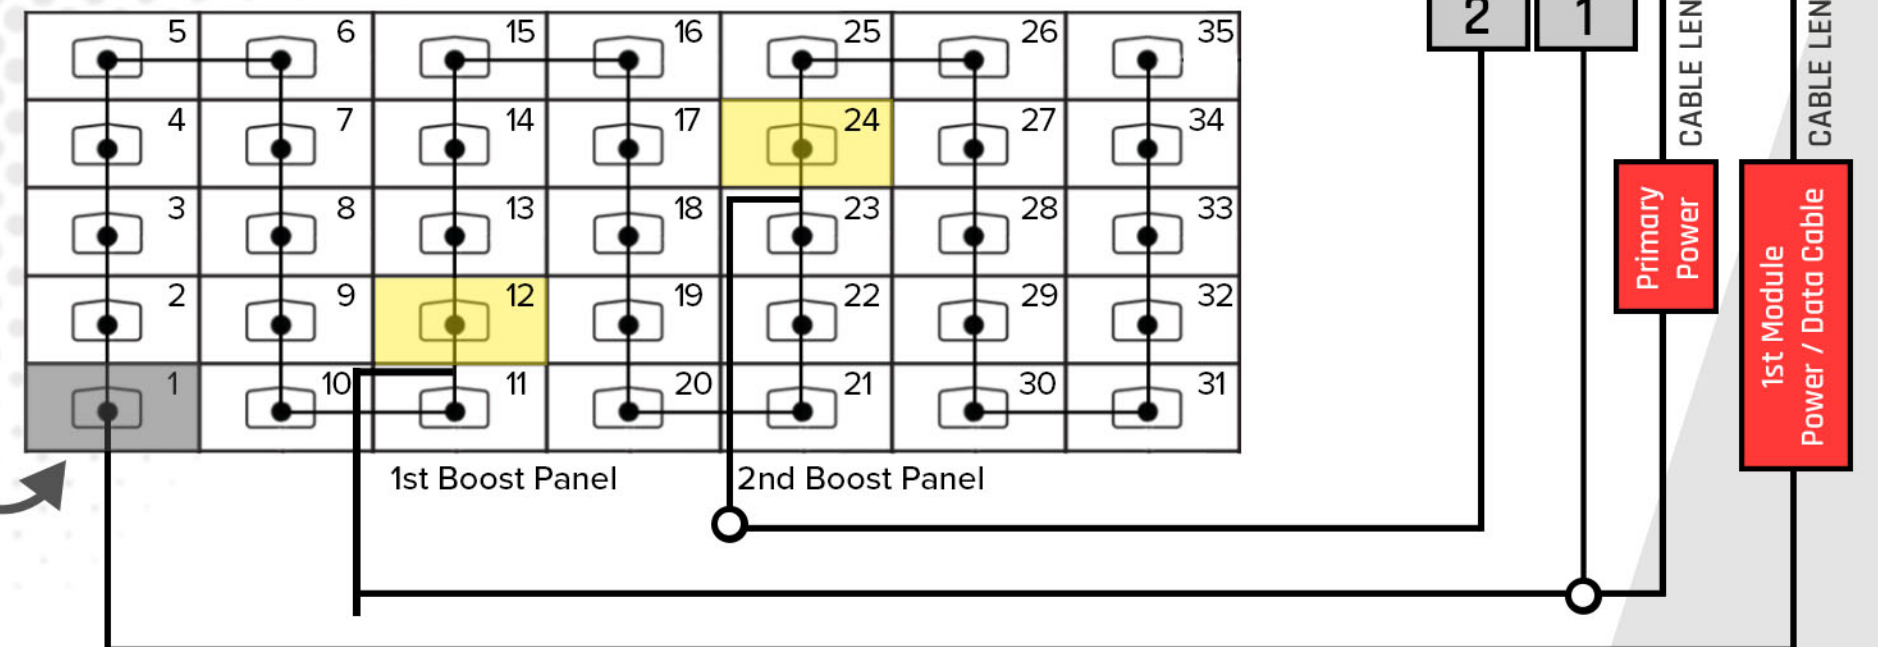

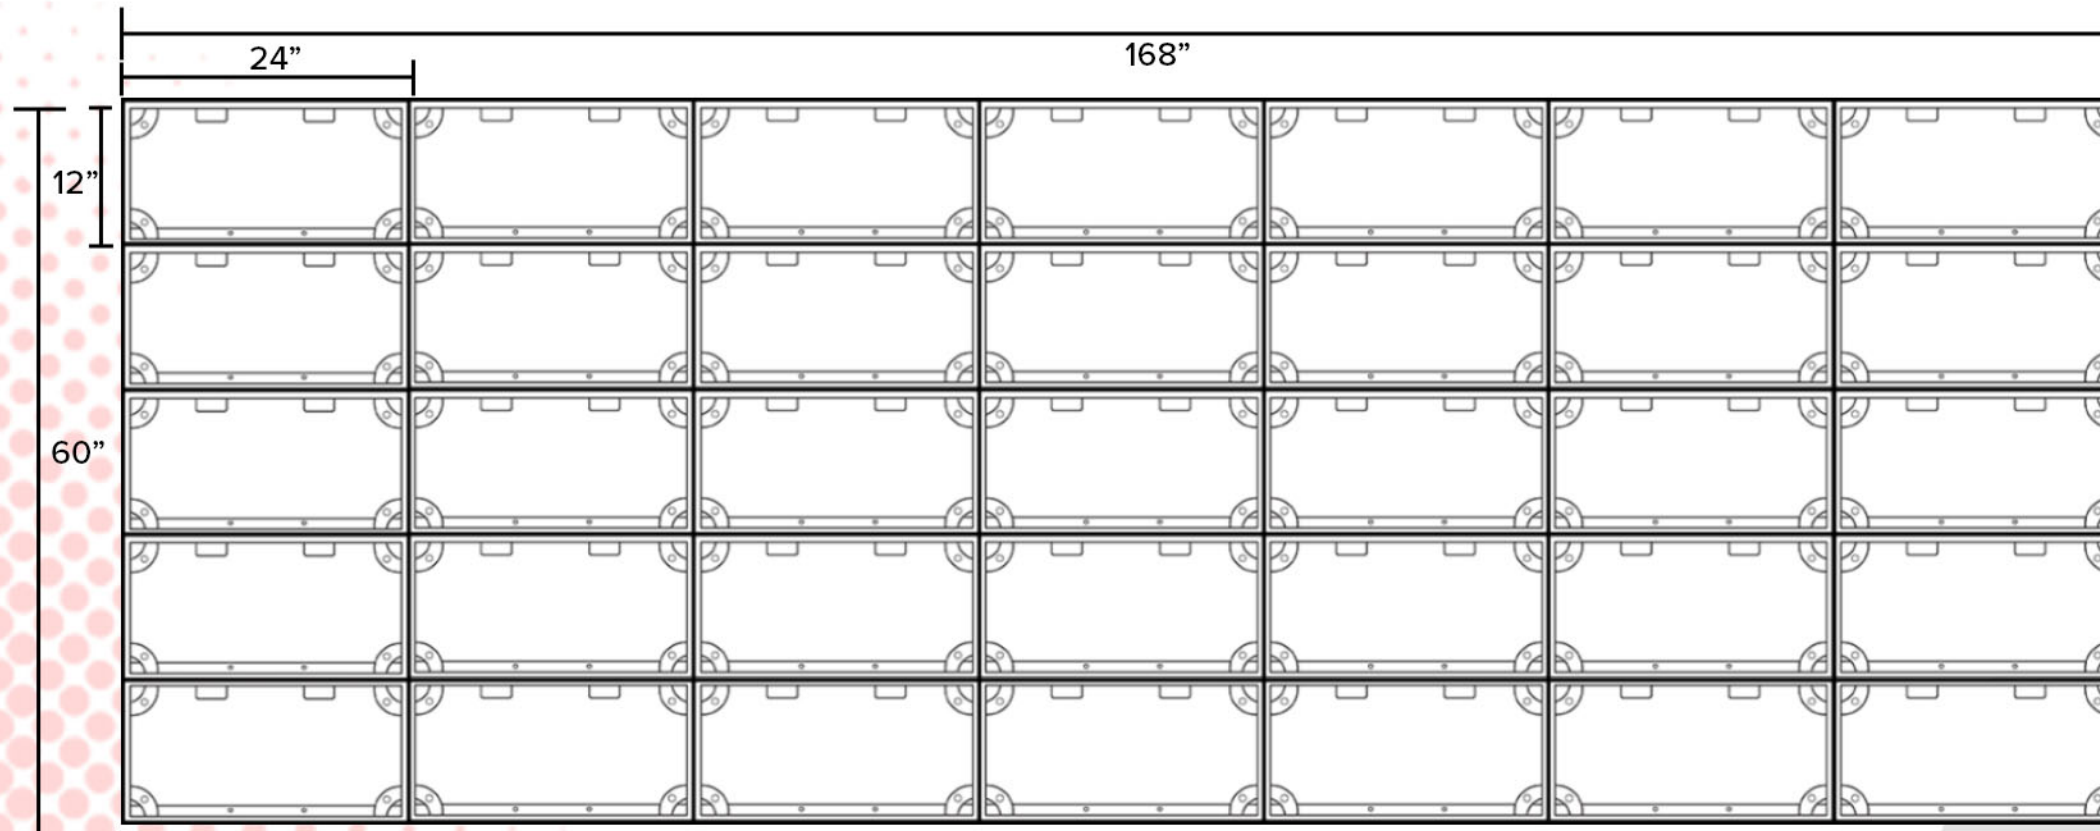

Must lift final assembled sign with a minimum of two lifting points. 330 maximum lbs per lifting pin.

Parts List	Single Face	Double Face
Module	35	70
Controller	1	1
Controller Cable Kit	1	2
Boost Power Cable	2	4

AND

Option 1: Single Frame Assembly	Single Face	Double Face
1' x 2' Frame	35	70
1' x 2' Frame Door	35	70


OR

Option 2: Mixed Frame Assembly	Single Face	Double Face
1' x 2' Frame Mixed	11	22
1' x 2' Frame Door Mixed	11	22
2' x 4' Frame Mixed	6	12
2' x 4' Frame Door Mixed	12	24

PRIMARY DISPLAY REAR VIEW

SHACKLE ATTACHMENT

The shackle cables should connect to the lifting pins at an angle of 30 degrees or less to prevent damage to the cabinet frame. Spreader bar should be used when three or more lifting pins are required per face.

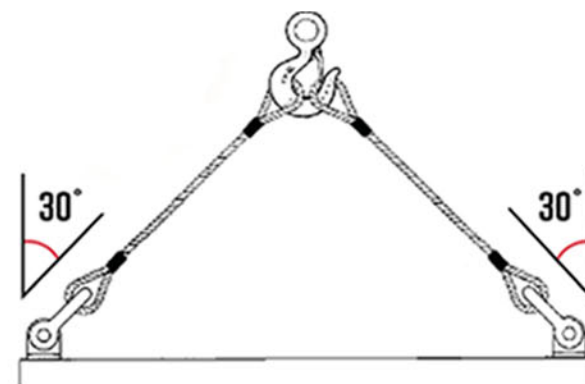

Display Weight	Maximum lbs	Maximum lbs per lifting pin	Number of Pins Per Face
Single Face	567.35	330	2
Double Face	1134.7	N/A	N/A